

Cables

Computers & Networking

TV Wall Mounts

Audio & Video

Mobile

Camera & Security

Pro Audio & Instruments

Gadgets

www.monoprice.com

Blackbird™ WiHD™ 60GHz Uncompressed Wireless HDMI® Extender

P/N **16049**

• Product pictures are for reference only.
• Specifications described herein are subject to change without prior notification.
• All trademarks are the sole property of their respective companies.
• Copyright © 2016 Monoprice, Inc. All rights reserved.

User's Manual

CONTENTS

SAFETY WARNINGS AND GUIDELINES	3
INTRODUCTION	3
FEATURES	4
CUSTOMER SERVICE	4
PACKAGE CONTENTS	4
PRODUCT OVERVIEW	5
Transmitter Front	5
Transmitter Rear	5
Receiver Front	5
Receiver Rear	5
LINK LED	6
MULTIFUNCTION BUTTON	6
INSTALLATION	7
SUPPORTED FORMATS	8
2D Video	8
3D Video	9
Audio	9
SPECIFICATIONS	10
REGULATORY COMPLIANCE	10
Notice for FCC	10
Radio Notice for FCC	11
Notice for Industry Canada	11

SAFETY WARNINGS AND GUIDELINES

- Do not subject the product to extreme force, shock, or fluctuations in temperature or humidity.
- This device is intended for indoor use only.
- Do not expose this device to water or moisture of any kind. Do not place drinks or other containers with moisture on or near the device. If moisture does get in or on the device, immediately unplug it from the power outlet and allow it to fully dry before reapplying power.
- Do not touch the device, the power cord, or any other connected cables with wet hands.
- Do not expose this device to excessively high temperatures. Do not place it in, on, or near heat sources, such as a fireplace, stove, radiator, etc. Do not leave it in direct sunlight.
- Prior to operation, check the unit and power adapter for physical damage. Do not use if physical damage has occurred.
- Before plugging the unit into a power outlet, ensure that the outlet provides the same type and level of power required by the device.
- Unplug this device from the power source when not in use.
- Take care to prevent damage to the power cord. Do not allow it to become crimped, pinched, walked on, or become tangled with other cords. Ensure that the power cord does not present a tripping hazard.
- Never unplug the unit by pulling on the power cord. Always grasp the connector head or adapter body.
- Clean using a soft, dry cloth only. Do not use chemical cleaners, solvents, or detergents. For stubborn deposits, moisten the cloth with warm water.
- This device has no user serviceable parts. Do not attempt to open, service, or modify this device.

INTRODUCTION

Thank you for purchasing this Blackbird™ Wireless HDMI® Extender! This USB-powered extender uses a 60GHz carrier frequency and can wirelessly transmit HDMI video to distances up to 98 feet (30 meters). It supports HDMI resolutions up to 1920x1080p@60Hz, video resolutions up to 1920x1200@60Hz, and up to 7.1 channels of High Bit Rate (HBR) lossless audio streams, including Dolby TrueHD™ and DTS-HD Master Audio™. It is compliant with the WiHD 1.1, HDMI 1.4, and HDCP 2.0 standards.

FEATURES

- Compliant with the HDMI version 1.4 specification
- Supports the HDCP 2.0 and WiHD™ 1.1 standards
- Supports HDMI resolutions up to 1920x1080p@60Hz and video resolutions to 1920x1200@60Hz
- Supports 7.1 channels of High Bit Rate (HBR) lossless audio streams, including Dolby TrueHD™ and DTS-HD Master Audio™
- Uses a 60Ghz carrier frequency
- Clear air wireless transmission distances up to 98 feet (30 meters)

CUSTOMER SERVICE

The Monoprice Customer Service department is dedicated to ensuring that your ordering, purchasing, and delivery experience is second to none. If you have any problem with your order, please give us an opportunity to make it right. You can contact a Monoprice Customer Service representative through the Live Chat link on our website www.monoprice.com during normal business hours (Mon-Fri: 5am-7pm PT, Sat-Sun: 9am-6pm PT) or via email at support@monoprice.com

PACKAGE CONTENTS


Please take an inventory of the package contents to ensure you have all the items listed below. If anything is missing or damaged, please contact Monoprice Customer Service for a replacement.

- 1x Wireless HDMI® extender transmitter
- 1x Wireless HDMI extender receiver
- 2x USB 5 VDC, 1A power adapters
- 2x USB to Micro USB cables
- 1x User's manual

PRODUCT OVERVIEW

Transmitter Front

1. **Link LED:** Multifunctional LED indicator. See the *Link LED* section for details.
2. **Power LED:** Illuminates when power is applied.

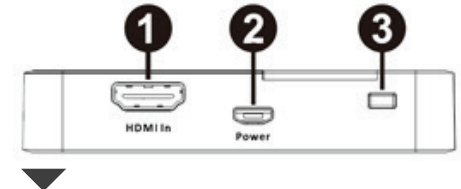


Transmitter Rear

1. **HDMI In:** Connect to the output of your HDMI source device.
2. **Power:** Connect to the USB power adapter using a USB to Micro USB cable.
3. **Multifunction Button:** See the *Multifunction Button* section for details.

Receiver Front

1. **Link LED:** Multifunctional LED indicator. See the *Link LED* section for details.
2. **Power LED:** Illuminates when power is applied.

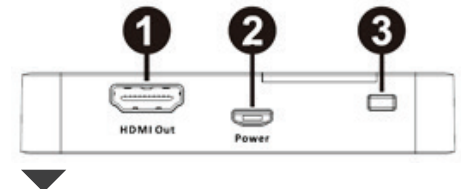

Receiver Rear

1. **HDMI Out:** Connect to the input on your HDMI® display.
2. **Power:** Connect to the USB power adapter using a USB to Micro USB cable.
3. **Multifunction Button:** See the *Multifunction Button* section for details.

LINK LED

The Link LEDs on the transmitter and receiver units have the following states:

- **Off:** When the Link LED is off, the device is either powered off or is in Sleep mode.
- **Slow Blink:** When the Link LED on the transmitter blinks slowly, the transmitter is in Scan mode, searching for a matching receiver. When the Link LED on the receiver blinks slowly, the receiver is in Beacon mode, searching for a matching transmitter.
- **Fast Blink:** When the Link LED blinks quickly, the transmitter and receiver have accepted each other and established a network.
- **On:** When the Link LED is on steadily, the transmitter and receiver have established a valid audio/video connection and video should be visible on the connected display.


MULTIFUNCTION BUTTON

The Multifunction buttons on the Transmitter and Receiver perform the following functions, depending on the adapter's status and the way that the button is pressed.

- **Wakeup Function:** If the adapter is in Sleep mode, a momentary press of the Multifunction button will wake the adapter and start normal operation.
- **Factory Default Function:** Press and hold the Multifunction button for ten seconds to reset the adapter to the factory default settings.
- **Next Network Function:** If the Transmitter is awake and the Multifunction button is pressed momentarily, the Transmitter will release its currently associated network and will join the next available network. If there is only one Receiver in the room, the Transmitter will eventually reestablish the original connection. A maximum of 10 Receivers can be supported in the same room.
- **Next Source Function:** If the Receiver is awake and the Multifunction button is pressed momentarily, the Receiver will release its current video connection and will connect with the next available source. If there are no other Transmitters available, the connection will not be interrupted. A maximum of 16 Transmitters can be supported in the network.

INSTALLATION

Perform the following steps to install and operate the Blackbird™ Wireless HDMI® Extender.

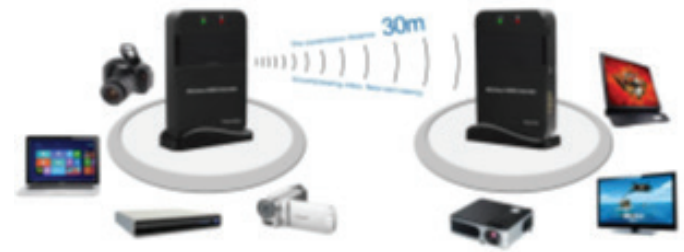

1. Ensure that all devices that will be connected are powered off and unplugged from their power sources.
2. Place or mount the Transmitter and Receiver in their intended locations.
3. Using a High Speed HDMI Cable (not included), plug one end into one of the HDMI inputs on your television or display, then plug the other end into the **HDMI Out** port on the Receiver.
4. Using a High Speed HDMI® Cable (not included), plug one end into the **HDMI In** port on the Transmitter, then plug the other end into the HDMI output of your HDMI source device (DVD player, etc.).
5. Using one of the included USB to Micro USB cables, plug one end into the **Power** port on the Receiver, then plug the other end into the USB power adapter. Plug the USB power adapter into a nearby AC power outlet. The **Power LED** on the Receiver should illuminate and the **Link LED** should start blinking slowly.
6. Using one of the included USB to Micro USB cables, plug one end into the **Power** port on the Transmitter, then plug the other end into the USB power adapter. Plug the USB power adapter into a nearby AC power outlet. The **Power LED** on the Transmitter should illuminate and the **Link LED** should start blinking slowly.
7. After a few moments, the **Link LEDs** on the two units should start blinking rapidly, indicating that the two adapters have established a valid network connection.
8. Plug in and power on all connected equipment. Start video playback on your HDMI source device. The **Link LEDs** on the transmitter and receiver should cease blinking and illuminate steadily. Your HDMI source material should be visible on the display.

Congratulations, you have successfully installed your Blackbird™ Wireless HDMI Extender!

SUPPORTED FORMATS

2D Video

Video Resolution	Refresh Rate (Hz)	Color Depth
640 x 480p (VGA)	60	RGB 4:4:4 (8 bits)
848 x 480 (WVGA)	60	RGB 4:4:4 (8 bits)
800 x 600 (SVGA)	60	RGB 4:4:4 (8 bits)
1024 x 768 (XGA)	60	RGB 4:4:4 (8 bits)
1280 x 1024 (SXGA)	60	RGB 4:4:4 (8 bits)
1680 x 1050 (WSXGA+)	60	RGB 4:4:4 (8 bits)
1920 x 1200 (WUXGA)	60	RGB 4:4:4 (8 bits)
480i	60	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2 (8 bits)
480p	60	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2 (8 bits)
576i	50	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2 (8 bits)
576p	50	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2 (8 bits)
720p	50/60	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2 (8 bits)
1080i	50/60	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2 (8 bits)
1080p	24/50/60	RGB 4:4:4 (8/10/12 bits) YCbCr 4:4:4 (8/10/12 bits) YCbCr 4:2:2 (8 bits)

SUPPORTED FORMATS

3D Video

Type	Resolution	Refresh Rate (Hz)
Frame Packing	1080p	24
	720p	50/60
Top-Bottom	1080p	24
	720p	50/60
Side-by-Side	1080i	50/60

Audio

Format	# of Channels	Sampling Rates (kHz)
LPCM	2	32, 44.1, 48, 88.2, 96, 176.4, 192
LPCM	6, 8	32, 44.1, 48, 88.2, 96
Dolby® Digital®	2, 5.1	48
Dolby Digital Plus®	2, 5.1, 6.1, 7.1	48
Dolby TrueHD™	5.1, 6.1, 7.1	48, 96
DTS-HD Master Audio™	5.1, 6.1, 7.1	48, 96
DTS-HD Master Audio™	2, 5.1	192

SPECIFICATIONS

Model	16049
Carrier Frequency	60GHz
Wireless Range	Up to 98 feet (30 meters)
Maximum Video Resolution	1920 x 1200 @ 60 Hz (WUXGA)
Maximum HDMI® Resolution	1920 x 1080p @ 60 Hz
Maximum Audio Channels	7.1
Maximum Audio Sampling Rate	192 kHz
Power Source	USB (5 VDC, 1A)
Maximum Power Consumption	3.5 watts
Operating Temperature	+32 ~ +104°F (0 ~ +40°C)
Storage Temperature	-4 ~ +140°F (-20 ~ +60°C)
Operating Humidity	20 ~ 90% RH, non-condensing
Dimensions	3.5" x 2.2" x 0.7" (90 x 56 x 17 mm)
Transmitter Weight	5.5 oz. (155 g)
Receiver Weight	5.4 oz. (153 g)

REGULATORY COMPLIANCE

Notice for FCC



This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Modifying the equipment without Monoprice's authorization may result in the equipment no longer complying with FCC requirements for Class B digital devices. In that event, your right to use the equipment may be limited by FCC regulations, and you may be required to correct any interference to radio or television communications at your own expense.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Radio Notice for FCC

Caution

This FCC Part 15 radio device operates on a non-interference basis with other devices operating at this frequency. Any changes or modification to said product not expressly approved by Monoprice, including the use of non-approved antennas, could void the user's authority to operate this device.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Notice for Industry Canada

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Blackbird™ is a trademark of Monoprice Inc.

HDMI®, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

Dolby®, Dolby Digital®, Dolby Digital Plus®, and the double-D symbol are registered trademarks of Dolby Laboratories. Dolby TrueHD™ is a trademark of Dolby Laboratories.

DTS® is a registered trademark and the DTS logos, Symbol, DTS-HD™, and DTS-HD Master Audio™ are trademarks of DTS, Inc.